XTND 4K (40m) Extender Manual

Product Code: XTND4K40

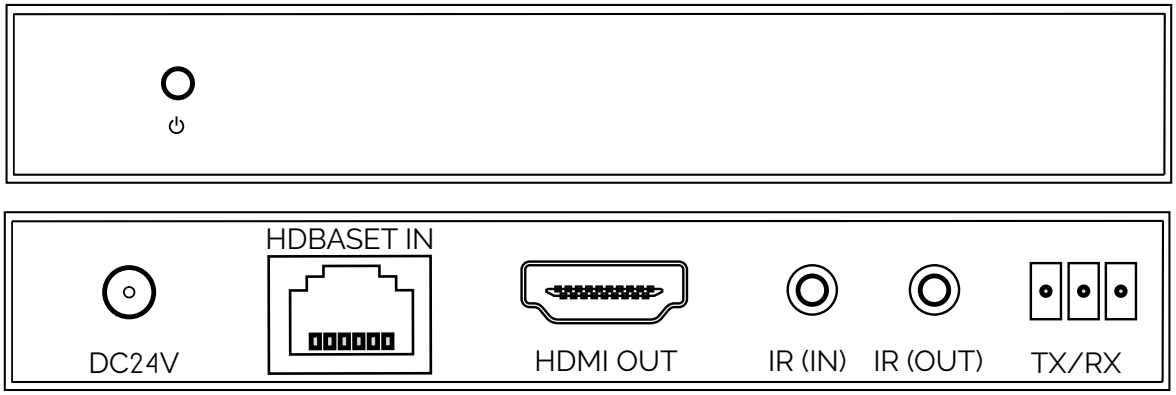

HDANYWHERE™

YOUR EXTENDERS

Use an XTND 4K (40m) extender to extend your favourite HDMI media device (DVD/Blu-Ray player, Xbox, Apple TV etc) to a HDTV located up to 70m away for 1080p content or 40m away for 4K devices.

XTND 4K (40m) requires Cat cabling to be run from the Transmitter to the display Receiver, which you can run yourself if capable or choose to have professionally installed.

IN THE BOX

1. x1 XTND 4K (40m) Transmitter
2. x1 XTND 4K (40m) Receiver
3. x1 24V / 1A DC PSU
4. x2 IR Transmitters (TX)
5. x2 IR Receivers (RX)
6. x4 wall mounting brackets

CONTENTS

Contents, introduction and box contents 2

5 minute quick setup guide and system features 3

Transmitter diagram 4

Receiver diagram 5

Setting up IR control 6

Standard wiring diagram 7

Product specification 8

Guarantee, warranty information and contacting customer support 9

QUICK SETUP

This quick setup guide will get your extender up and working in less than 5 minutes. If you need to integrate IR control then please continue on to **page 6**.

1. Power off your display and your HDMI source device
2. Connect the HDMI source to the HDMI input on the XTND 4K (40m) Transmitter using an appropriate HDMI cable.
3. Connect a display such as a HDTV or HD Projector to the HDMI output port on the XTND 4K (40m) Receiver using an appropriate HDMI cable. We recommend that you use high-speed HDMI cables no longer than 5 meters in length.
4. Now connect a single Cat5e/6 cable up to 230ft/70m in length between the Cat output port of the XTND 4K (40m) Transmitter and the Cat input port on the XTND 4K (40m) Receiver.
5. Plug in the power supply for either the Transmitter or the Receiver.
6. Power on your HDMI source device, then power on your display.
7. At this point the display should show the video and audio of the HDMI source device that is connected to the extender.

SYSTEM FEATURES

1. Delivers uncompressed video and audio over network cable
2. Supports the following resolutions:

   a. 640x480, 800x600, 1024x768, 1280x1024, 1600x1200, 1920x1080,1920x1200, 4096x2160p (DCI), 3840x2160p (UHD) DTV/HDTV: 480i/576i/480p/576p/720p/1080i/1080p/4Kx2K

   b. All 3D formats including 3D at 1080p60

   c. Up to 48-Bit Deep Colour
3. Enables HD viewing in one additional room
4. Stereo or multichannel audio including:

   a. LPCM 7.1CH

   b. Dolby True HD

   c. DTS-HD Master Audio

   d. Dolby Atmos

   e. DTS: X
5. Two-way IR
6. Bi-directional RS232 control.

TRANSMITTER (X1)

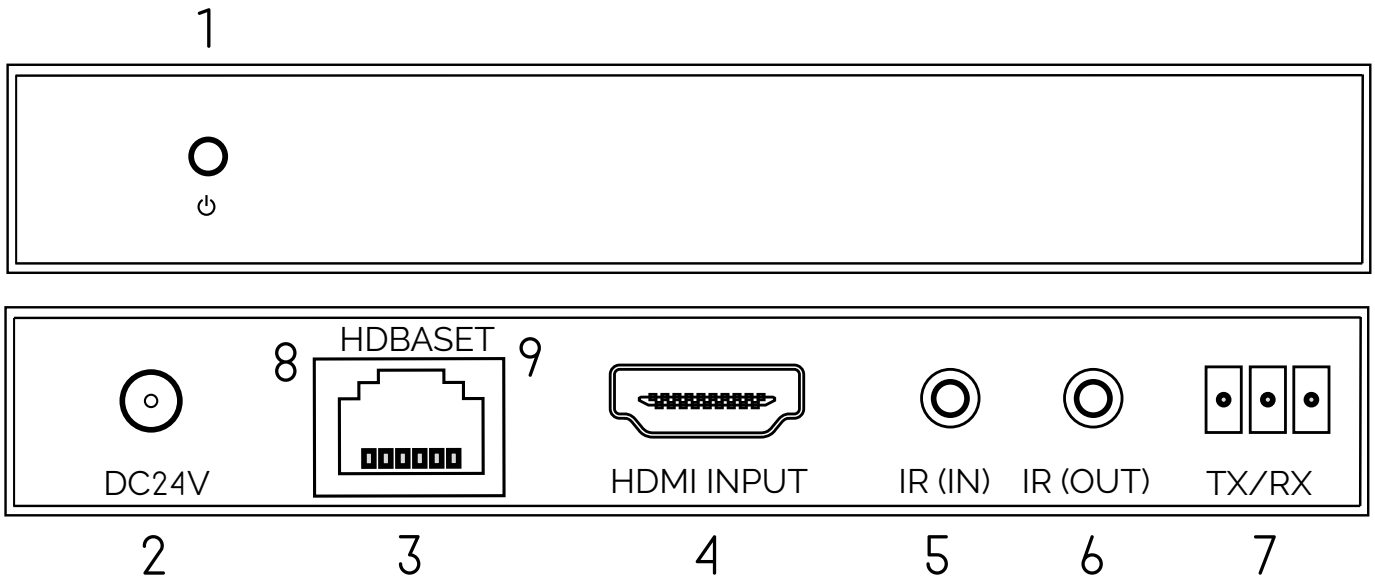

1. **Power LED**: This white LED illuminates when the device is connected to its power supply
2. **DC input**: Plug the 24V / 1A DC power supply into the unit
3. **HDBaseT output**: Connect the CAT 5e/6 cabling run from the Receiver to this port
4. **HDMI Input port**: Connect HDMI source e.g. BluRay player, with HDMI cable
5. **IR RX**: Plug IR RX into this port (if using forwards IR)
6. **IR TX**: Plug IR TX into this port
7. **RS232 input/output**: Connect an RS232 cable via phoenix connector
8. **Connection status LED**:

   i. Solid: The Transmitter and Receiver have a good connection

   ii. Flashing: The Transmitter and Receiver have a poor connection

   iii. Dark: The Transmitter and Receiver have no connection
9. **Data status LED**:

   i. Solid: There is a HDMI connection with HDCP

   ii. Flashing: There is a HDMI connection with no HDCP

   iii. Dark: No HDMI signal

RECEIVER (X1)

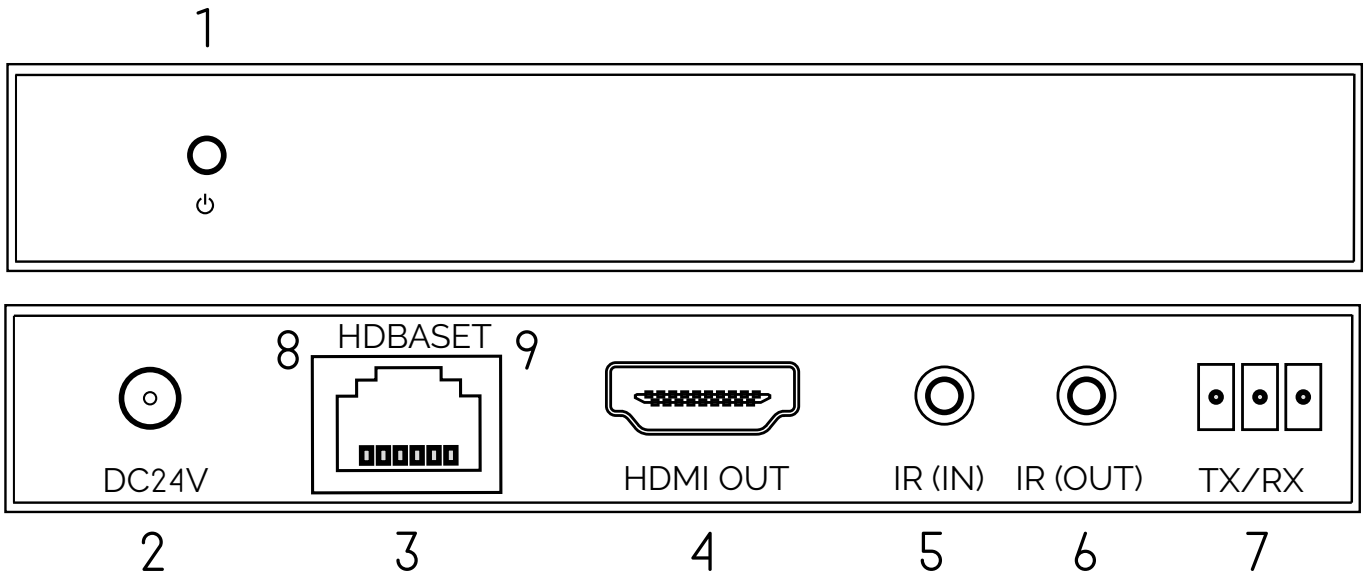

1. **Power LED**: This white LED illuminates when the device is connected to its power supply
2. **DC input**: Plug the 24V / 1A DC power supply into the unit
3. **HDBaseT input**: Connect the CAT 5e/6 cabling run from the Receiver to this port
4. **HDMI output port**: Connect HDMI source e.g. BluRay player, with HDMI cable
5. **IR RX**: Plug IR RX into this port
6. **IR TX**: Plug IR TX into this port (if using forwards IR)
7. **RS232 input/output**: Connect an RS232 cable via phoenix connector
8. **Connection status LED**:

   i. Solid: The Transmitter and Receiver have a good connection

   ii. Flashing: The Transmitter and Receiver have a poor connection

   iii. Dark: The Transmitter and Receiver have no connection
9. **Data status LED**:

   i. Solid: There is a HDMI connection with HDCP

   ii. Flashing: There is a HDMI connection with no HDCP

   iii. Dark: No HDMI signal

SETTING UP IR CONTROL

This will enable backwards IR control (the most common form of IR control) where IR signals from a remote in your distant location is sent back to the extender and sent to your source device to make it appear as though it is in the same room as you.

SOURCE CONTROL VIA IR (BACKWARDS IR)

1. Plug IR Transmitter TX into the 3.5mm jack port labelled IR TX on the XTND 4K (40m) Transmitter
2. Place IR Transmitter TX bud (small circular part) in front of the IR eye of the source (where you would normally point the remote to control the HDMI source device).
3. Plug IR Receiver RX into the 3.5mm jack port labelled IR RX on the XTND 4K (40m) Receiver.
4. Place IR Receiver at or near the display (position it close to where you would usually point your remote to turn your TV on or off).

DISPLAY CONTROL VIA IR (FORWARDS IR)

1. Plug IR Transmitter TX into the 3.5mm jack port labelled IR TX on the XTND 4K (40m) Receiver.
2. Place IR Transmitter TX in front of the IR eye of the display (position it where you would usually point your remote to turn on or off your TV).
3. Plug IR Receiver RX into the 3.5mm jack port labelled IR RX on the XTND 4K (40m) Transmitter
4. Place IR Receiver in a visible uncovered position where it is able to receive remote signals.

STANDARD WIRING DIAGRAM

This is a typical wiring diagram that shows how we would expect an XTND 4K (40m) Extender set up to look once installed. This diagram features a single HDMI source device (a BluRay player) being sent to 1 room, with a display located up to 70 metres away, and with IR controlling the source device via backwards IR.

Key

- IR cable
- HDMI cable - 5m / 16ft Max
- HDMI over cat cable - 70m / 230ft Max
- Connection
- Direction
- IR Transmitter
- IR Receiver

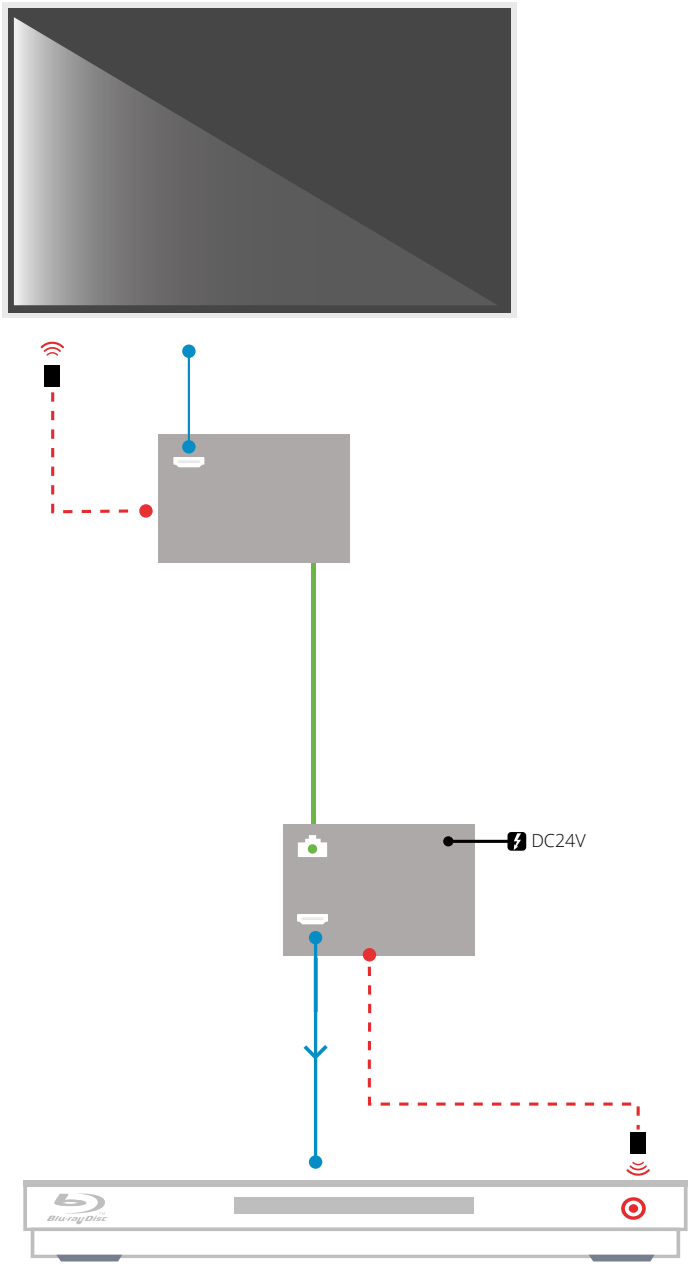

SPECIFICATION

Frequency bandwidth
297MHz (10.2Gbps)

Transmitter input/output ports
x1 HDMI input
x1 Cat 5e/6
x1 IR Transmitter
x1 IR Receiver
x1 Phoenix connector (rs232)

Receiver input/output ports
x1 HDMI output
x1 Cat 5e/6
x1 IR Transmitter
x1 IR Receiver
x1 Phoenix connector (rs232)

Power supply
x1 DC 24V 1A

ESD Protection Human Body Model
± 8kV (air-gap discharge) ± 4kV (contact discharge)

Dimensions (mm) (Width x Depth x Height)
Display Receiver (65x115x17)

Weight (g)
Display Receiver 200g x2

Operating temperature
0°C ~ 40°C / 32°F ~ 104°F

Storage temperature
-20°C ~ 60°C / -4°F ~ 140°F

Relative humidity
20 ~ 90% RH (Non-condensing)

Maximum power consumption
20W

TWO-YEAR REPLACEMENT WARRANTY & GUARANTEE

A one-year worldwide replacement guarantee covering HDanywhere™ electronic devices is provided by HD Connectivity Ltd. . If you need to use this guarantee, please contact HDanywhere Customer Services: support@hdconnectivity.com or telephone (0)1648 576 348 during UK office hours.

Hereby, HDanywhere™ declares that this HDMI connectivity device is in compliance with the essential requirements and other relevant provisions of the following Directives: 2006/95/EC (LVD Directive); 2004/108/EC (EMC Directive); 999/5/EC (R&TTE Directive).

HDANYWHERE™

www.hdanywhere.co.uk