Grandview

Cyber Speed Control Pull Down User's Manual

Grandview

MOODY
M
UKAS
QUALITY
MANAGEMENT
INTERNATIONAL
CERTIFICATION   014
ISO9001:2000
International Certification

Model : CB-Sxx

Thank you for purchasing a Grandview projection screen.

Before use, please read this manual carefully. After installation, keep this manual for future reference.

Description

Floating wall bracket

Aluminium casing

Screen fabric

Top panel

Upper hook

Baffle

Lower hook

Locking screw

Handle
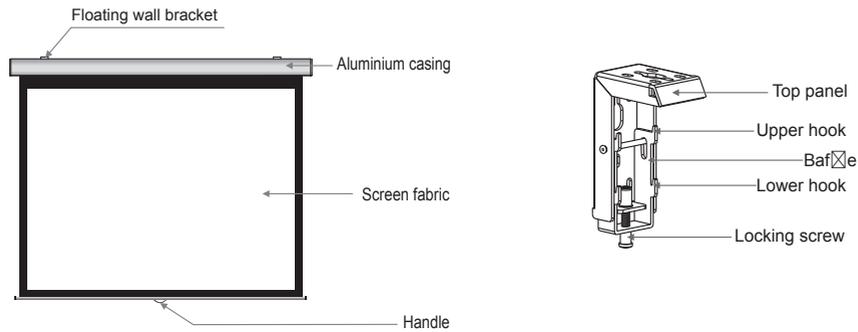
Accessaries

■ Floating wall bracket(2pcs)

■ Ø5× 40mm Tapping screw & cap (8sets)

■ M5x10 Screw (6pcs)

■ Hanging bracket (2pcs)

■ Instruction manual (1pc)

Installation

Take out all the parts from the packaging to ensure you have all necessary components.

There are three installation measures for this product, namely wall mount, ceiling mount and ceiling hang. The installed distance can be changeable up to your needs via adjusting the slipper block, while the ideal position is the mounting bracket is at its nearest point to the end cap, which can reduce unnecessary vibration or noise.

Wall and ceiling installation:

1. Mount the wall/ceiling brackets using the appropriate screws for your supporting material.
2. Ensure the brackets are horizontal and near the ends of the casing. Fasten to the wall or ceiling, not both. (Figure 1) .
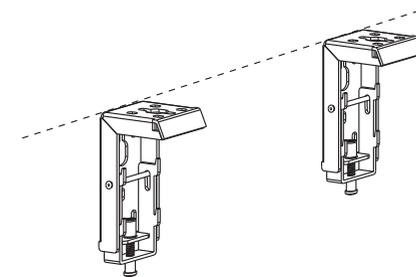
Figure 1

Installation Steps
a) Wood supporting materials: Drill in the Ø5 x 40 screws through the appropriate holes in the bracket (Figure 2-3).
b) Concrete supporting materials: Install the anchors and drill in the 5Øx 40 screws into the appropriate bracket holes. (Figure 4-5).

Wood wall installation | Wood ceiling installation | Concrete wall installation | Concrete ceiling installation

Figure 2 | Figure 3 | Figure 4 | Figure 5

3. Loosen the locking screw to lower the bracket clamp all the way down.   (Figure 6-7)
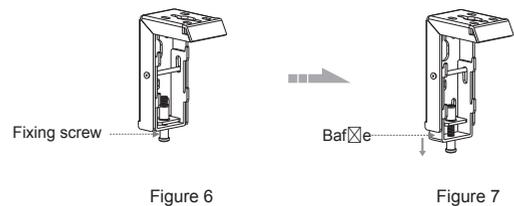
Fixing screw

Baffle

Figure 6   Figure 7

4. Mount the projection screen by sliding the casing grooves over the bracket hooks. (Figure 8-9)

Up groove

Down groove
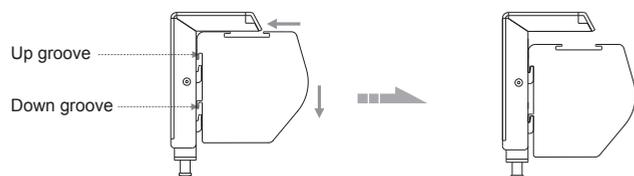
Figure 8   Figure 9

5. Tighten the locking screw to clamp the screen securely in place. (Figure 10-11)
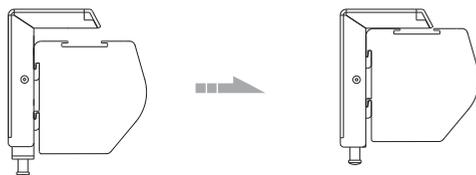
Figure 10   Figure 11

Ceiling hang installation

Each end of the screen casing needs to be supported by a hook (not provided). Ensure that the suspension system (cable and/or hook) can support the weight of the screen.

1. To drill two same holes with an electric drill horizontally with wall, then fasten hangers (unprovided) onto the ceiling. (Figure 12)
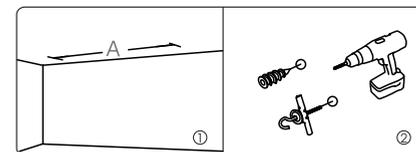
A

①   ②

Figure 12

2. Use three M5x10mm screws to fasten the hanging brackets, to the wall and ceiling brackets as shown. (Figure 13-14)

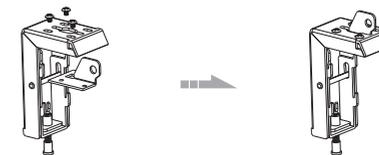Figure 13   Figure 14

3. Attach the wall and ceiling brackets to the casing as shown in figures 15 and 16.
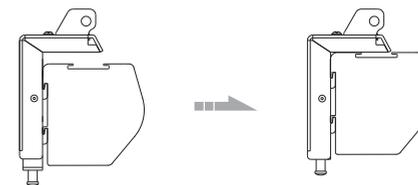
Figure 15   Figure 16

4. Place hooks through the hanging brackets to suspend the projection screen as shown. See figure 17.
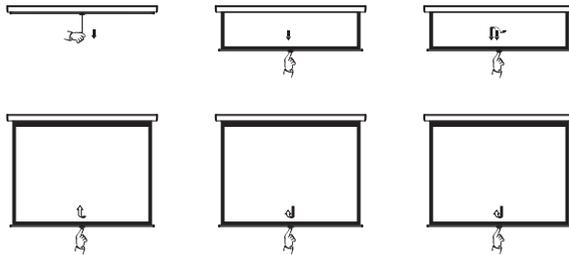
Figure 17

Operation

1. Use rope to pull down bottom rod until within hand reach distance.
2. Lower the screen by pulling down the handle. Once in position, hold for 3 seconds; the self locking mechanism will lock the screen into position
3. Retract the screen by pulling down the handle and then let go of it. The screen will retract at the controlled speed into the casing.

Warnings

- The warranty will only be valid if you follow the instructions below carefully! Improper use and care may cause serious injury and/or damage!.
- Make sure the Fixing screw be fastened when using the wall bracket, to avoid any damage.
- Make sure the surface you have chosen for installing the screen is ☐at and secure.
- Please read the following as any damage to the screen surface will impact the image's quality:
  1. Do not touch the screen surface by hand.
  2. Do not write or draw on the screen surface.
  3. Do not poke the screen surface by ☐nger or edge tools, as it may cause scratches or tears.
  4. Do not use any detergent or cleaning products to clean the screen surface, please clean it with a soft cloth and lukewarm water.
- Retract the screen after every use.
- Ensure the screen is level when it is wall-mounted installation, when the screen is spread, it should be balanceable with the wall.
- Do not pull two sides of the screen fabric by hands, do not fold the screen fabric.
- To prevent unnecessary damage, the operation and maintenance of the screen should be done by adult.

⚠	Ignoring the safety warnings may lead to injuries or damaging the product.	❗	The screen should be installed at secure place to avoid any accidents or the screen falling down.
❗	Retract the screen after every use. Leave it hanging for a long period may cause screen fabric loose	🚫	Please contact your local dealer for repair or maintenance, and contact us if you have any further questions. Avoid taking apart the ☐xtures by yourself. Loose parts may cause the screen fall down.
⊗	Avoid hanging anything on the screen as it may cause the screen to fall down.		

Do not take apart and replace with unknown parts. If there are any problems, please contact your local dealer. Product speci☐cations are subject to change.