

[Search](#)[nordichifi.com/](#)[English](#)[🏠](#) / [Passive Speakers](#) / [Vestlyd V12C/V15C](#) / [Manual: Vestlyd V12C/V15C](#)

Manual: Vestlyd V12C/V15C



📝 Last updated on October 28, 2024 at 2:44 PM

1. Contents of the boxes:

- The speakers come in two boxes, each containing a Vestlyd V12C/V15C speaker.
 - Quick Start Guide
 - A front grille for each speaker
-

2. Connecting The Speakers


Connecting

Each speaker is equipped with a terminal on the back featuring connectors for the positive and negative wires from your amplifier.

These terminals support bare speaker cable of up to 4mm² or can be connected using banana plugs.

Standard speaker cable consists of two cores or wires, one for positive and one for negative. Ensure that the positive core/wire is connected to the positive terminal and the negative core to the negative terminal between the amplifier and speaker(s).

Visual example

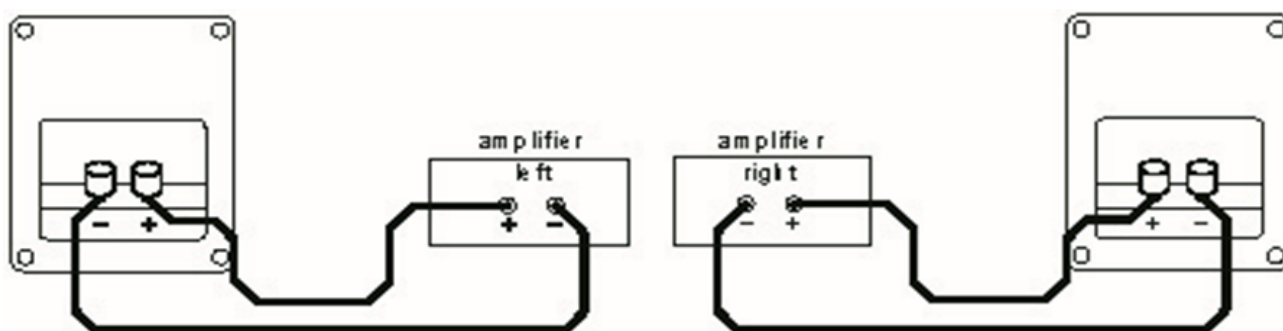

speakON



The Vestlyd speakers are also equipped with a speakON connector. If using a speakON, make sure to use "1+" and "1-" on the connector, regardless of whether it's a 2 or 4 pole connector.



WIRING: 2 POLE



WIRING: 4 POLE

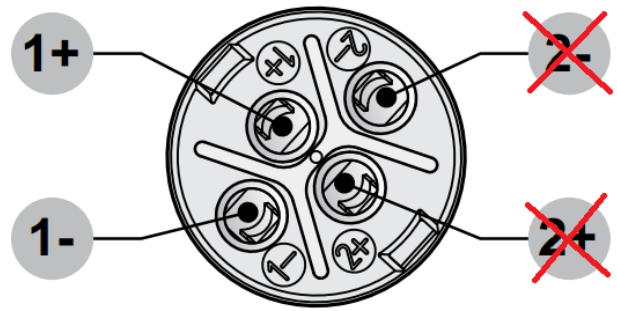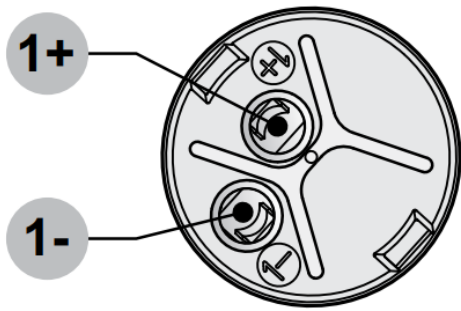

3. Tips & Tricks

We strive to ensure you experience the full potential of your Argon Speakers. Therefore, we've put together an article containing valuable Tips & Tricks to help you achieve optimal performance with your speakers.

Article: [Tips & Tricks: Speakers](#)

4. Specifications

	V12C	V15C
Freq. response [Hz -6dB]	39-22.000 Hz	36-22.000 Hz
Impedance [Ohm]	4 ohm	
Sensitivity [dB @2,83V]	93	95
Crossover Freq. [Hz]	1100 Hz	
Woofers	12" with paper cone	15" with paper cone
Woofers motor system	Ferrite	
Compression driver	1" Laminated TI dome w/high power neodymium motor	
Weight	24 kg	34 kg
Dimensions (w/ feet) HxWxD	622 x 392 x 367mm	742 x 468 x 417mm

Max. rec. amplifier power

300 watts

500 watts

- 2-way coaxial bass reflex construction with 2 x bass port (front)
 - Terminals: banana/screw + Neutrik speakON
 - Cabinet in MDF (front baffle 31 mm), finish in synthetic leather
 - Black fabric frame for front included
-

4. Colors

These pictures are of the V15C, but the finish is consistent across the entire series.



Black



Oak

Was this article helpful?



Vestlyd V12C/V15C

Manual: Vestlyd V12C/V15C

Troubleshooting: Vestlyd V12C/V15C

FAQ: Vestlyd V12C/V15C

Related Articles

Manual: Argon Audio FORUS

Manual: Argon Audio SA1 MK2

Manual: Argon Audio SA2

FAQ: Argon Audio FORUS

Manual: Argon Audio FORTE MK2